


# 驱动链

## Driving chains

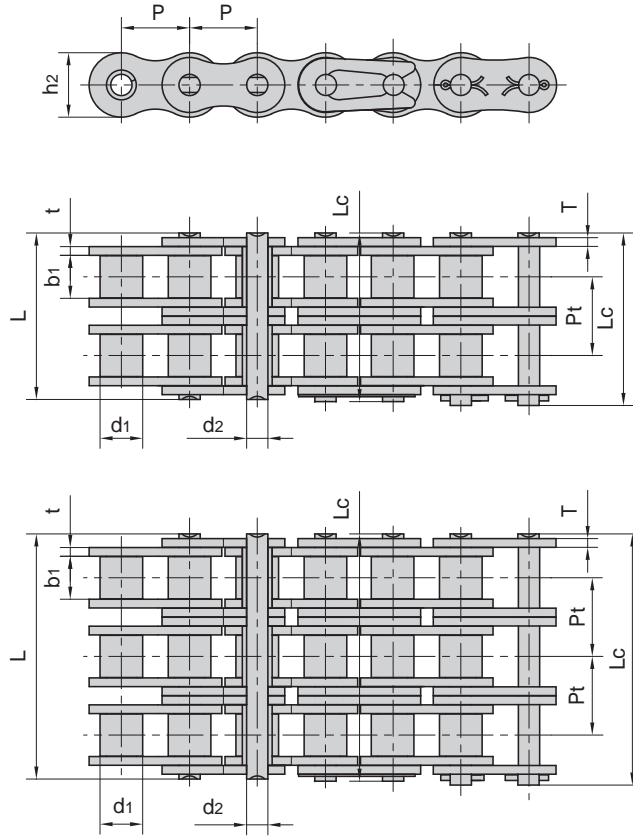

东华链号 Donghua Chain No.	节距	滚子直径	内节内宽	销轴直径	销轴长度		内链板高度	链板厚度	排距	极限拉伸载荷	平均拉伸载荷	每米长重
	Pitch	Roller diameter	Width between inner plates	Pin diameter	Pin length	Pin length	Inner plate depth	Plate thickness	Transverse pitch	Ultimate tensile strength	Average tensile strength	Weight per meter
	P mm	d1 max mm	b1 min mm	d2 max mm	L max mm	Lc max mm	h2 max mm	t/T max mm	Pt mm	Q min kN/lbf	Q0 kN	q kg/m
20A-2	31.75	19.05	18.90	9.53	76.4	80.5	30.00	4.00	35.76	177.00/39791	219.4	7.80
20AFT-2	31.75	19.05	18.90	9.53	76.4	80.5	30.10	4.00	35.76	211.68/47587	262.5	8.09
20A-3	31.75	19.05	18.90	9.53	112.2	116.3	30.00	4.00	35.76	265.5/59686	309.6	11.77
20AFT-3	31.75	19.05	18.90	9.53	112.2	116.3	30.10	4.00	35.76	330/74186	395.0	12.10
24A-2	38.10	22.23	25.22	11.10	95.8	99.7	35.70	4.80	45.44	254.00/57101	314.9	11.70
20B-3	31.75	19.05	19.56	10.19	114.2	117.9	26.40	4.50/3.50	36.45	250/56202	290.0	10.82
24B-2	38.10	25.40	25.40	14.63	101.7	106.2	33.20	4.50/3.50	48.36	280.0/62946	319.2	13.40
100SLR-2	31.75	19.05	18.90	9.53	76.4	80.5	30.00	4.00	35.76	173.4/39399	190.0	7.89
16BSLR-2	25.40	15.88	17.02	8.28	68.0	69.3	21.00	4.15/3.10	31.88	106.0/23829	133.0	5.42